BiO 330H

A3 laminator 高速過膠機








專業6滾筒(4熱2冷) **6 Heater Rollers**



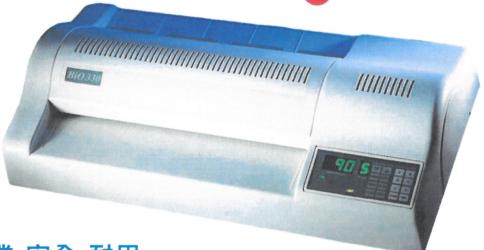

高速 專業 安全 耐用

BIO出口歐美的頂級過膠機

以BiO頂級結構為藍本,全新44T精鋼齒輪,升級馬達

3分鐘快速加熱,1分鐘完成6張A4過膠,過膠厚度達3mm

6滾筒,雙重加熱,同步擠出空氣,保持過膠平直, 高透明,亮麗無汽泡,可長時間操作,外殼不燙手, 適合快印行業、沖印店、學校、政府部門及辦公室。

- ●Clean Work Environment, ISO 14001 及無鉛物料認證
- ●專業 6 滾筒 CERACON heater rollers (4 熱 2 冷),省電高效率
- 微處理器,直流馬達,恆溫風扇,準確控制溫度速度
- ●符合歐盟 EMC/美國 UL 的工程塑料外殼及防漏電設置,安全不燙手
- LED 數字面板,輕觸按鍵,改變設定時閃爍及聲頻提示
- ●重量級 15kg=33磅,44T 精鋼齒輪,真材實料,穩定耐用
- •專業維修隊,一年市區上門保用,免費指導操作,輔以電話支援

BiO 330H technica	l data 規 格		
最大過膠寬度 Maximum laminating width	330 mm		
最大過膠厚度 Maximum laminating thickness	3 mm		
每分鐘過膠速度 Laminating speed (minute)	0-180 cm 1分鐘6張A4		
溫度調節 Operation temp.	0-140 c (160 c 斷電保護)		
加熱時間 (分鐘) Warning-up time (minute)	3		
功率 Power	1000W, 220~240V		
機器尺寸 (寬 x 深 x 高) Dimension (W x L x H)	580 x 295 x 140 mm		
重量Weight	15 kg		

PREH preheat REV reverse MEAS temperature display COLD cold mounting

恆溫及預熱功能 退回按鍵即時溫度顯示

專業 6 滾筒,44T 精鋼齒輪,微處理器及直流馬達 6 heater rollers, 44T metal gear, microprocessor and DC mo



LED 數字面板 LED control panel

Temp and Speed indi	cating lamp	Temp control	Speed contro	Speed control Button	
TEMPERATU MEAS READY PREHT COLD	IRE SPEED CARRI MOUNT HOT	MEAS CARRI PREHT MOUNT COLD HOT	5 66 3 4 1 2 STOP RE		
Indicating lamp of au	Sutton Auto-s	electing Function I	outton		

過膠套·過膠膜·冷裱膜

Laminating Pouch & Roll Film



宜安過膠套 高透明,暢銷20年信心保證 80 mic 150 mic 100 mic 200 mic RoHS無毒害 及 NP 環保證書 125 mic 250 mic

80 mic 150 mic

	小證件	2R	3R	4R	5R	A5
	60x90mm	65x95mm	98x136mm	108x147mm	135x185mm	154X216mm
	A4	A3	A3+	12R	F4	證書
	216X303mm	303x426mm	310x460mm	212x315mm	222X356mm	279x404mm

BiO 330H laminator

This is a high speed laminator designed for heavy duty and professional purpose, suitable for photo shop, office, school.. "Clean Work Environment" and ISO 14001 certified, production from lead free materials. Equipped with six. CERACON heater rollers and DC motor, this laminator transfers the heat quickly and steadily into each roller and runs the roller smoothly, so that you can get a fine lamination result every time. Microprocessor control system, optimum laminating temperature and roller speed are able to be automatically selected, appropriated for various types of lamination. User can be protected in case of accident such as electrical shock and heat from the laminator, as all covers are made of industrial type plastic. Power saving due to the lower operating temperature and automatic control of speed and temperature, Soft Touch control panel & Alarm System, the signal light & sound alert appeared during the changes of mode.

南韓製浩

Made in KOREA

12個月保用 12 months warranty





IEC為香港政府認可安全標準



CE



HANG LUNG PACKING & STATIONERY CO. LTD 恆隆包裝文具有限公司